



ELECTRONIC 12-CHANNEL COUNTER CVC 1220CS (SERVO-DRIVEN FLAPS)



The CVC 1220CS is our newest Electronic Channel Counter designed for high speed, highly accurate counting of tablets, capsules, and soft gels. The system has been upgraded with servodriven flaps to improve accuracy of pre-countfunctions.


In addition, the servo system adds to longevity of the assembly and reduce the requirement to replace pneumatically driven actuators.

STANDARD FEATURES

- Single or Double Bottle Discharge
- 12 V-shaped channels per head (tool less change over)
- Auto dust compensation and dual dust extraction ports
- Powered height adjustment and track-full/empty sensors
- 2.83M-motorized single lane sanitary conveyor (single head)
- 4.95M-motorized dual lane sanitary conveyor (dual head)
- Single or Double Bottle Discharge
- Rejection System
- Memory capacity for up to 1000 jobs (*Requires Touch Screen controller)

FEATURE BENEFITS

- Independently controlled by servo motors
- Provide precise and absolute control
- High accuracy positioning and low-noise level
- Prolong life expectancy of drive unit
- Reduce the frequency for replacement

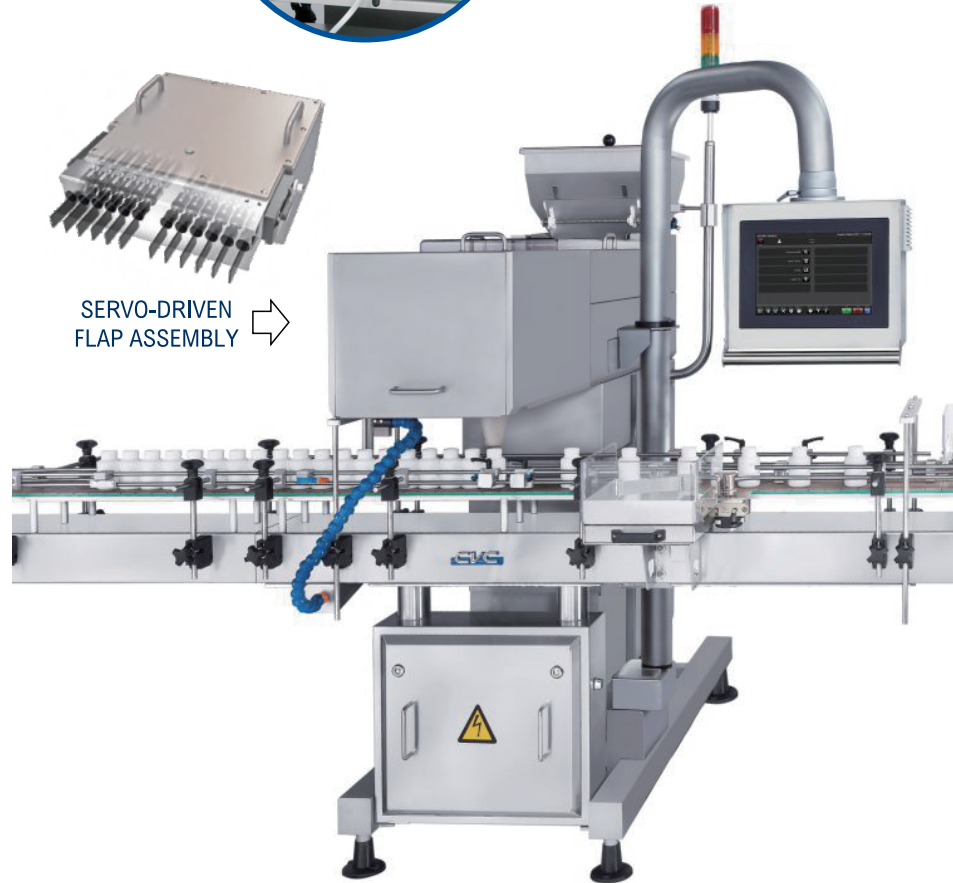

CVC 1220CS Technical Specifications

Productivity	up to 55±5 BPM with single discharge funnel / 85±5 BPM with double discharge funnel (subject to trial confirmation)
Applicable Size	Product: Length: 2-30 mm (1/16" to 1 1/4") Width/Dia.: 2-20 mm (1/16" to 3/4") Bottle: Dia.: Ø30-120 mm (1 1/4" to 4 3/4") Height: 40-200 mm (1 1/2" to 7 3/4")
Hopper Capacity	35 L (1.24 Cuft)
Power Source	230 V, 50/60 HZ, 1 PH
Power Consumption	950 VA (4.2 A)
Air Pressure	6 bar (87 psi)
Air Consumption	25 NL/MIN. (1CFM)
Machine Dimensions [L x W x H]	680 x 1,780 x 1,870 mm (approx) [2'-3" x 5'-10" x 6'-2"]
Machine Weight	475 kg (1,047 lbs)
Noise Level	75-80 dB

Technical data contained in this material are not binding and may be subject to change without prior notice.

TECHNICAL SPECIFICATIONS

AVAILABLE OPTIONS

- Channel blocker
- Container upside down or fallen sensor
- Floor loaded pre-feeder with integrated controls
- Hopper level control system with tower lamp
- Industrial PC, Windows 10 (21CFR Part 11 Compliant)
- Static eliminator bar
- Dual counting heads are available
- Tablet Inspection Vision System (OEM)




OPTIONAL: TABLET FEEDERS




SERVO-DRIVEN FLAP ASSEMBLY

MACHINE LAYOUTS

Top View

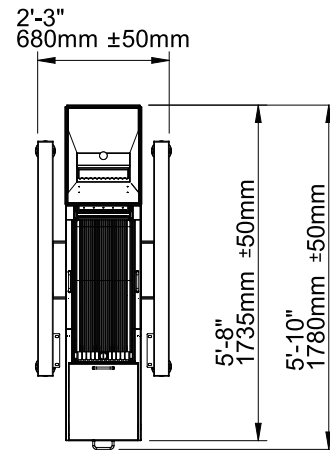

Front View

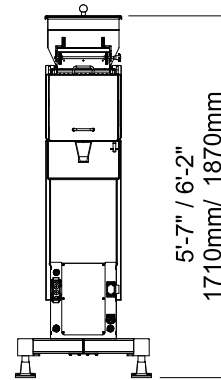

The dimensions shown are for standard machine. The conveyor can be extended: the length may vary based on selected options. This machine can run independently or be integrated into an automated packaging line. All CVC equipment is covered by a one-year parts warranty. Full Warranty details are included in our equipment proposals.



Contact Us

USA

10861 Business Drive, Fontana, CA 92337
Phone: +1 (909) 355-0311
www.cvcusa.com ; www.cvctechnologies.com
sales@cvcusa.com

Taiwan-Asia Pacific Headquarters

Phone: +886 (4) 2496-3666
sales@cvctechnologies.com

India

Phone: +91 (22) 2562-1242, +91 (22) 2562-1243
sales@cvctechnologies.com

China

Phone: +86 (512) 8363-6368
sales@cvctechnologies.com